


- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA



①重型 (HEAVY TPYE)

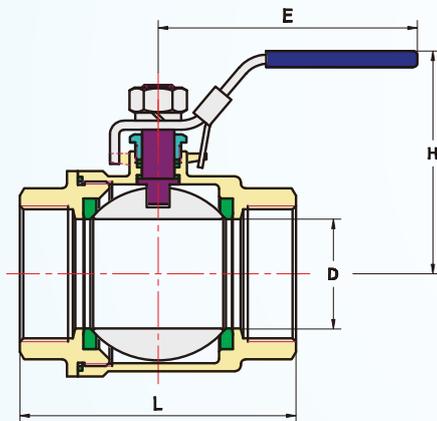


②科技型 (TECHNOLOGY TPYE)



③德标型 (M3 TPYE)

材质清单 MATERIALS LIST

SIZE	D	L			E	H	
		①	②	③-M3			
DN8	1/4"	10	55	55	55	11.5	50
DN10	3/8"	12	55	55	60	11.5	50
DN15	1/2"	15	63	55	75	14	58
DN20	3/4"	20	73	62	80	15	62
DN25	1"	25	84	72	90	15	72
DN32	1-1/4"	32	98	83	110	18	80
DN40	1-1/2"	38	106	94	120	19	90
DN50	2"	50	121	113	140	19	98
DN65	2-1/2"	64	160	140	185	23	125
DN80	3"	78	185	170	205	25	138
DN100	4"	100	225	205	240	28	156

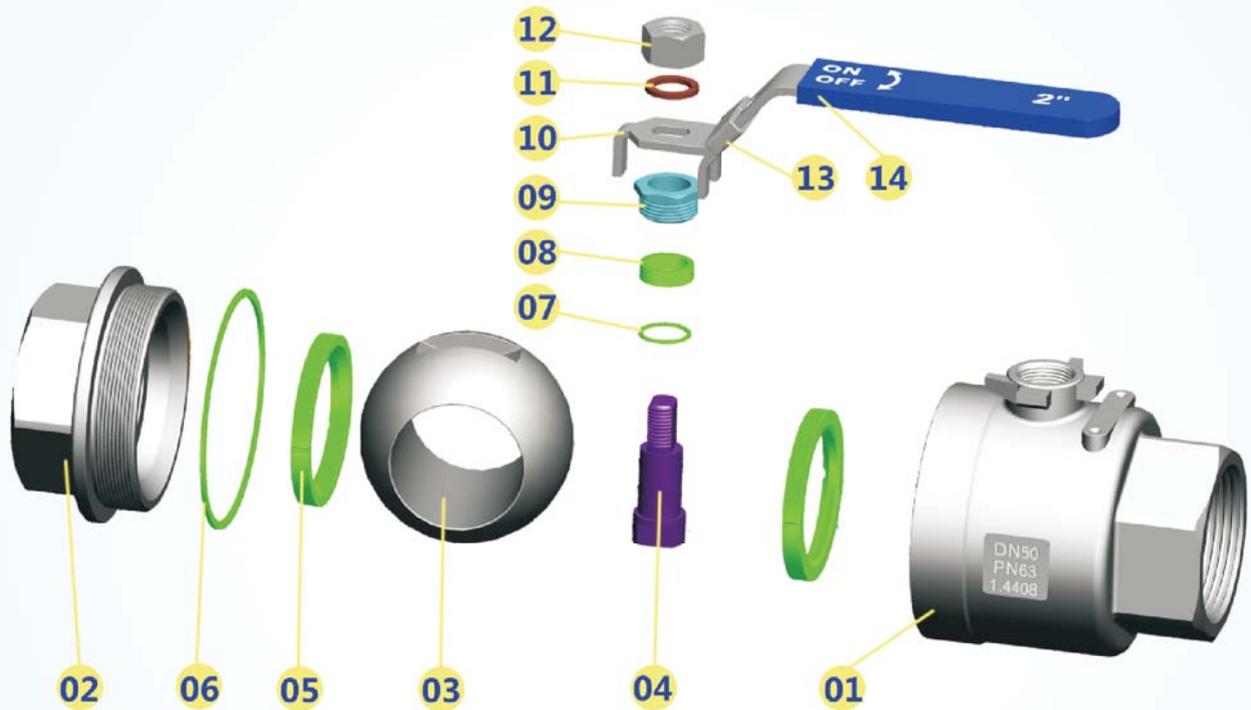



材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST		
1	阀体 BODY	CF8M	CF8	WCB
2	阀盖 END CAP	CF8M	CF8	WCB
3	球 BALL	SS316	SS304	SS304
4	阀杆 STEM	SS316	SS304	SS304
5	阀座 SEAL	RTFE	RTFE	RTFE
6	线条 BODY SEAL	PTFE	PTFE	PTFE
7	杆密封 THRUST WASHER	PTFE	PTFE	PTFE
8	中头垫 STEM PACKING	PTFE	PTFE	PTFE
9	填料压套 GLAND	SS304	SS304	SS304
10	手柄 HANDLE	SS304	SS304	SS304
11	弹垫 STUD	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8
12	螺帽 NUT	A194.Gr.8	A194.Gr.8	A194.Gr.8
13	锁片 LOCKING PAD	SS304	SS304	SS304
14	胶套 HANDLE COVER	PLASTIC	PLASTIC	PLASTIC

二片式2000WOG内螺纹球阀
2PC 2000WOG TYPE BALL VALVE THREAD END

DAGO

- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:2000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA

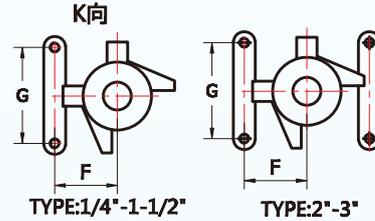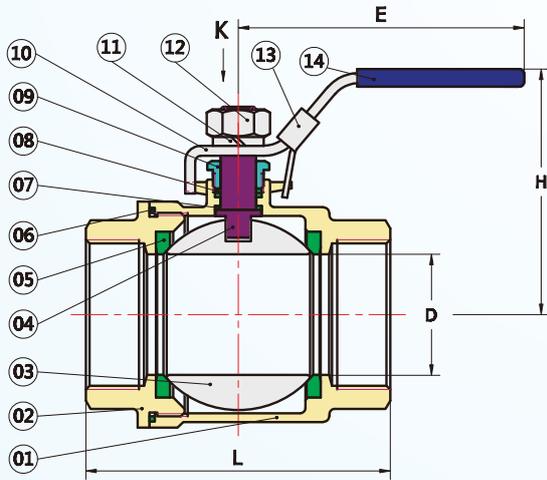

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST		
1	阀体 BODY	CF8M	CF8	WCB
2	阀盖 END CAP	CF8M	CF8	WCB
3	球 BALL	SS316	SS304	SS304
4	阀杆 STEM	SS316	SS304	SS304
5	阀座 SEAL	RTFE	RTFE	RTFE
6	线条 BODY SEAL	PTFE	PTFE	PTFE
7	杆密封 THRUST WASHER	PTFE	PTFE	PTFE
8	中头垫 STEM PACKING	PTFE	PTFE	PTFE
9	填料压套 GLAND	SS304	SS304	SS304
10	手柄 HANDLE	SS304	SS304	SS304
11	弹垫 STUD	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8
12	螺帽 NUT	A194.Gr.8	A194.Gr.8	A194.Gr.8
13	锁片 LOCKING PAD	SS304	SS304	SS304
14	胶套 HANDLE COVER	PLASTIC	PLASTIC	PLASTIC

外形尺寸 OUTER SIZE


Unit:mm

SIZE	D	L	E	H	F	G
1/4"	11.5	60	102	46	12.7	28.5
3/8"	12	60	102	46	12.7	28.5
1/2"	25	62	105	50	12.7	28.5
3/4"	20	74	120	56	22.1	35
1"	25	83	150	74	22.1	35
1-1/4"	32	94	163	79	23.6	38
1-1/2"	38	110	170	82	23.6	38
2"	49	125	180	94	23.6	38
2-1/2"	65	158	220	130	35	54
3"	78	185	245	145	35	54

二片式内外螺纹球阀 2PC BALL VALVE THREAD END (FEMALE-MALE)

DAGO

- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPa

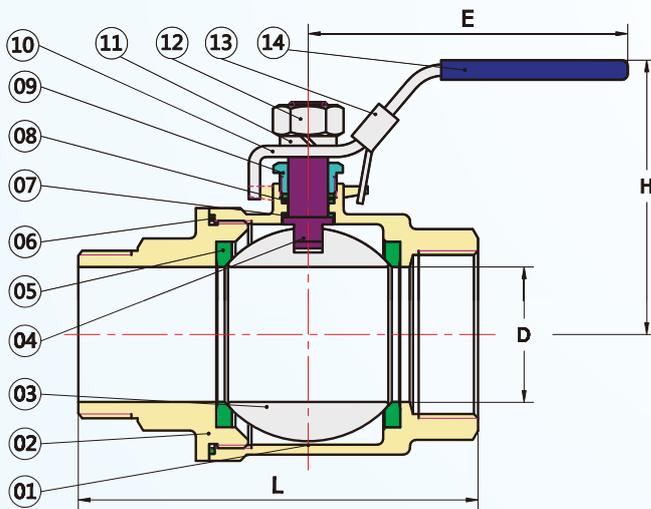

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST		
1	阀体 BODY	CF8M	CF8	WCB
2	阀盖 END CAP	CF8M	CF8	WCB
3	球 BALL	SS316	SS304	SS304
4	阀杆 STEM	SS316	SS304	SS304
5	阀座 SEAL	RTFE	RTFE	RTFE
6	线条 BODY SEAL	PTFE	PTFE	PTFE
7	杆密封 THRUST WASHER	PTFE	PTFE	PTFE
8	中头垫 STEM PACKING	PTFE	PTFE	PTFE
9	填料压套 GLAND	SS304	SS304	SS304
10	手柄 HANDLE	SS304	SS304	SS304
11	弹垫 STUD	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8
12	螺帽 NUT	A194.Gr.8	A194.Gr.8	A194.Gr.8
13	锁片 LOCKING PAD	SS304	SS304	SS304
14	胶套 HANDLE COVER	PLASTIC	PLASTIC	PLASTIC

外形尺寸 OUTER SIZE



Unit:mm

SIZE	D	L	E	H
1/4"	8	75	102	42
3/8"	10	75	102	42
1/2"	15	75	98	58
3/4"	20	85	118	65
1"	25	95	126	64
1-1/4"	32	115	136	80
1-1/2"	40	130	145	86
2"	50	155	173	95.5

二片式高平台内螺纹球阀
2PC BALL VALVE MOUNING PAD THREAD END

DAGO

- 防爆阀杆/全口径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA

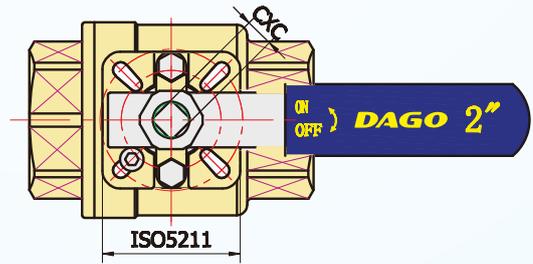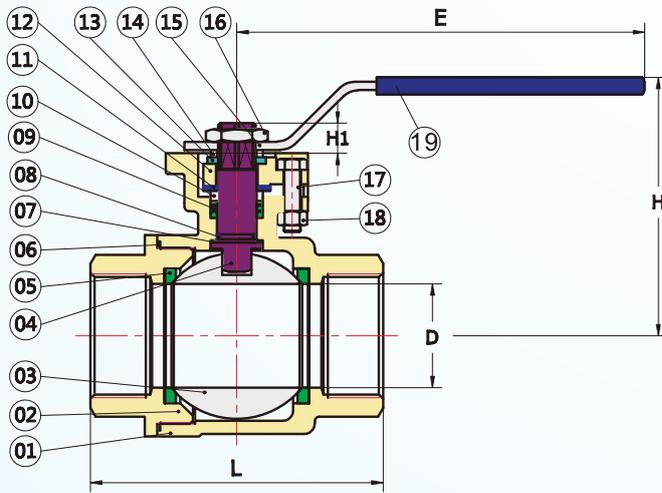

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST	材质 MATERIALS LIST
1	阀体 BODY	CF8M	Cf8
2	阀盖 END CAP	CF8M	CF8
3	球 BALL	SS316	SS304
4	阀杆 STEM	SS316	SS304
5	阀座 SEAL	RTFE	RTFE
6	线条 BODY SEAL	PTFE	PTFE
7	杆密封 THRUST WASHER	PTFE	PTFE
8	O型圈 STEM O-RING	VITON	VITON
9	中头垫 STEM PACKING	PTFE	PTFE
10	填料压套 GLAND	SS304	SS304
11	碟簧 BELLEVILLE WASHER	SS304	SS304
12	填料压套 GLAND	SS304	SS304
13	定位片 STOP WASHER	SS304	SS304
14	金属垫 WASHER	SS304	SS304
15	手柄 HANDLE	SS304	SS304
16	螺帽 HANDLE NUT	SS304	SS304
17	螺栓 BOLT	SS304	SS304
18	螺母 NUT	SS304	SS304
19	胶套 HANDLE COVER	PLASTIC	PLASTIC

外形尺寸 OUTER SIZE

Unit:mm

SIZE	D	L	E	H	H1	C
1/2"	15	62	120	70	9	9
3/4"	20	74	137	78	9	11
1"	25	86	137	82	11	11
1-1/4"	32	96	187	88	11	11
1-1/2"	38	108	187	93	14	11
2"	50	120	187	103	14	14
2-1/2"	65	160	315	165	17	17
3"	85	185	315	180	17	17
4"	100	225	265	200	17	17