

Lug knife gate valve(Pneumatic)

Model: GKA673

DAGO



Products Range:

Pressure rate: Class 150

Size:2"-32"

Body material: Ductile iron, carbon steel, stainless steel,
duplex stainless steel

Operated type: Pneumatic actuator

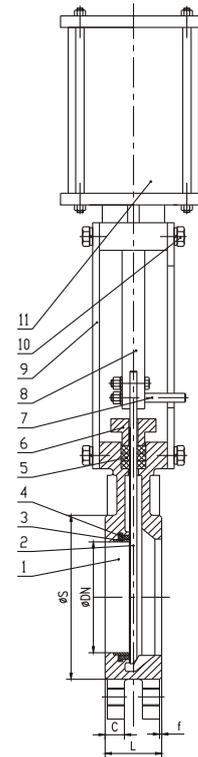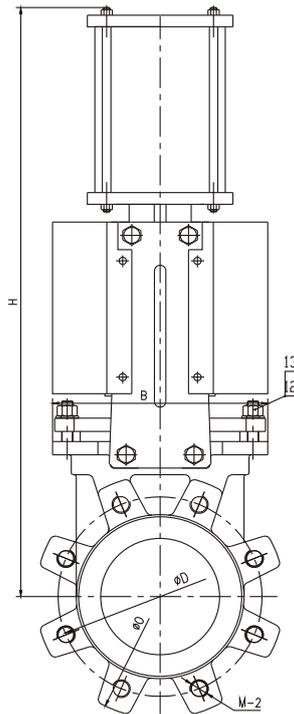

●Main dimensions

DN		L	O	D	S	C	f	M-(UNC)	B	H
in	mm									
2"	50	48	152	120.5	91.9	16	1.6	4-M5/8"-11	136	430
2 1/2"	65	48	178	139.5	104.8	16		4-M5/8"-11	151	460
3"	80	51	190	152.5	127.0	17		4-M5/8"-11	170	510
4"	100	51	229	190.5	157.2	17		8-M5/8"-11	190	570
5"	125	57	254	216	185.4	17		8-M3/4"-10	212	660
6"	150	57	280	241.5	215.9	21		8-M3/4"-10	230	720
8"	200	70	343	298.5	269.7	21		8-M3/4"-10	286	890
10"	250	70	406	362	323.8	24		12-M7/8"-9	338	1120
12"	300	76	483	432	381.0	24		12-M7/8"-9	388	1230
14"	350	76	533	476	412.7	33		12-M1"-8	460	1370
16"	400	89	597	540	469.9	35		16-M1"-8	520	1570
18"	450	89	635	578	533.4	36		16-M1"1/8-7	585	1720
20"	500	114	700	635	584.2	37		20-M1"1/8-7	635	1850
24"	600	114	813	749.5	692.1	37		20-M1"1/4-7	720	2150

≥28",please inquiry

Bi-directional Knife Gate Valve

Model: GLK6(B)73



DAGO

Pressure rate:PN10

Size:DN50-DN1200

Body material: Ductile iron-GG40

Operated type: Pneumatic actuator

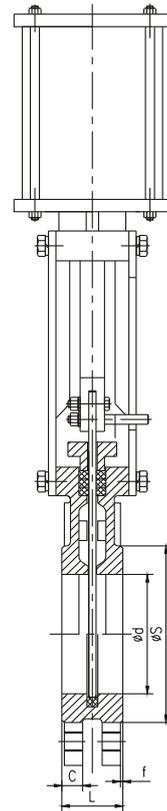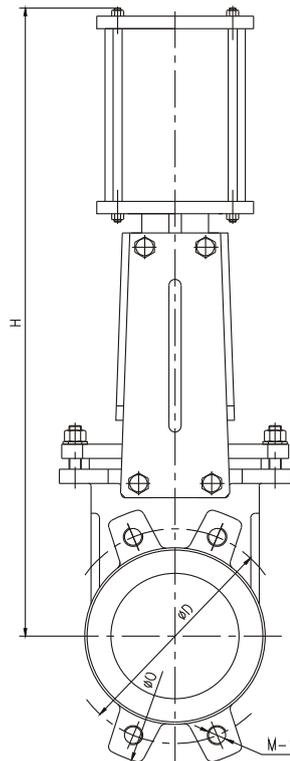

● Main dimensions

DN	L	O	D	S	C	f	M-1	B	H	重量 (KGS)
50	40	165	125	95	16	2	4-M16	136	430	7
65	40	185	145	110	16	2	4-M16	151	460	9
80	50	200	160	127	17	2	8-M16	170	510	12
100	50	220	180	148	17	2	8-M16	190	570	14
125	50	250	210	174	17	2	8-M16	212	660	22
150	60	285	240	199	21	2	8-M20	230	720	25
200	60	340	295	250	21	2	8-M20	286	890	38
250	70	395	350	308	24	2	12-M20	338	1120	65
300	70	445	400	360	24	2	12-M20	388	1230	77
350	96	505	460	416	33	2	16-M20	460	1370	195
400	100	565	515	466	35	2	16-M24	520	1570	240
450	106	615	565	525	36	2	20-M24	585	1720	306
500	110	670	620	584	37	2	20-M24	635	1850	365
600	110	780	725	664	37	2	20-M27	720	2150	420

≥DN700 please inquiry

Through conduit knife gate valve

Model: GTC673

DAGO


Products Range:

Pressure rate:PN10

Size:DN50-DN400

Body material: Ductile iron, stainless steel, duplex stainless steel

Operated type: Pneumatic actuator. Handwheel op. on request.

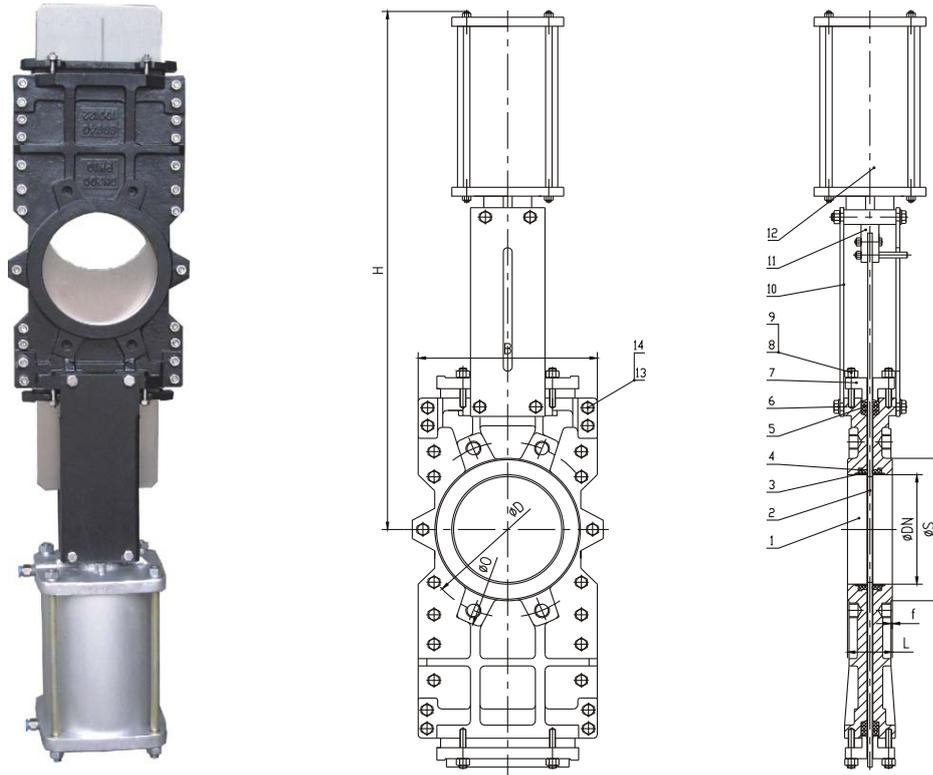

●Main dimensions

DIN

DN		L	O	D	S	C	f	M-1(UNC)	B	H
in	mm									
6"	150	60	285	240	199	21	2	8-M20	240	950
8"	200	60	340	295	250	21	2	8-M20	295	1150
10"	250	70	395	350	308	24	2	12-M20	375	1320
12"	300	70	445	400	360	24	2	12-M20	420	1550

≥DN350, please inquiry

MSS SP81

DN		L	O	D	S	f	M-1(UNC)	B	H
in	mm								
6"	150	57	280	241.5	199	1.6	8-M3/4"-10	240	950
8"	200	70	343	298.5	250	1.6	8-M3/4"-10	295	1150
10"	250	70	406	362	308	1.6	12-M7/8"-9	375	1320
12"	300	76	483	432	360	1.6	12-M7/8"-9	420	1550

≥14" please inquiry