

A48SH-¹⁶/₂₅C/I/V型 高温弹簧全启式安全阀 High temperature spring full lift safety valve

● 用途:


A48SH-C型适用于工作温度≤425℃, A48SH-I 型适用于工作温度≤510℃, A48SH-V 型适用于工作温度≤550℃的蒸汽等介质的设备和管路上, 作为超压保护装置。

● Use:

A48SH-C, at a working temperature less than 425℃, A48SH-I, at a working temperature less than 510℃, and A48SH-V, at a working temperature less than 550℃, are used for the equipment and pipelines with such media as steam as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	尺寸 Dimension			≈H
			L	L ₁	DN'	
25	25	15	110	95	32	395
40	40	25	120	110	50	418
50	50	32	135	120	65	525
50	50	32	135	120	80	525
80	80	50	170	135	100	675
100	100	65	205	160	125	748
100	100	65	205	160	150	748
150	150	100	230	210	200	1135
200	200	125	290	310	250	1230
250	250	150	350	320	300	1285

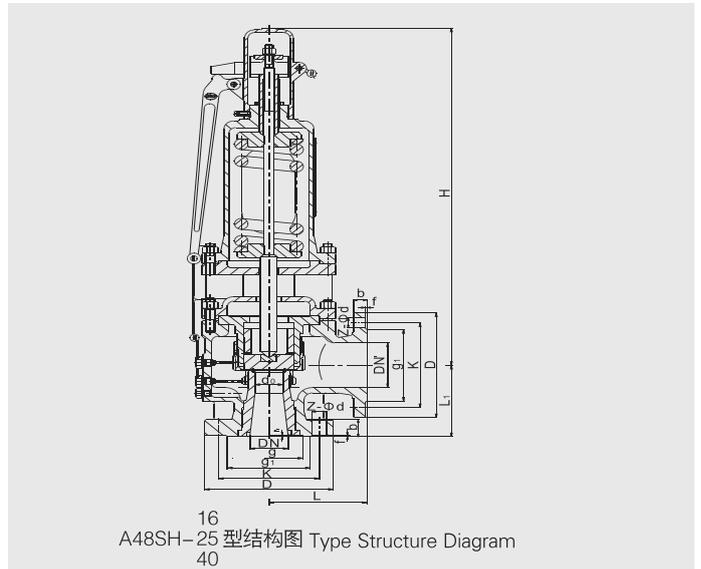

A48SB-⁶⁴/₁₀₀/₁₆₀C/I/V型 高温高压弹簧全启式安全阀 High temperature and high pressure spring full lift safety valve

● 用途:

A48SB-C型适用于工作温度≤425℃, A48SB-I 型适用于工作温度≤510℃, A48SB-V 型适用于工作温度≤550℃的蒸汽等介质的设备和管路上, 作为超压保护装置。

● Use:

A48SB-C, at a working temperature less than 425℃, A48SB-I, at a working temperature less than 510℃, and A48SB-V, at a working temperature less than 550℃, are used for the equipment and pipelines with such media as steam as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	尺寸 Dimension			≈H
			L	L ₁	DN'	
40	40	25	135	120	50	518
50	50	32	160	130	65	625
50	50	32	160	145	80	600
80	80	50	175	160	100	740
100	100	65	220	200	125	920
100	100	65	220	200	150	920
150	150	90	280	280	200	1128
200	200	125	300	295	250	1350
250	250	150	370	390	350	1430

型号 Type	公称通径 DN	Nominal Diameter	do	L	L ₁	DN'	≈H
HFA48TH-100	50	32	160	145	80	580	
HFA48SB-160	80	40	215	210	150	820	

