


- 防爆中轴/全流BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 150°C
- 使用压力PRESSURE:PN63/1000WOG
- 设计制造DESIGN:GB/T-12237/ANSI B16.34
- 尺寸参照FLANGE DIMENSIONS:GB/ T-9113.1 /ASME B16.5 CLASS 150
- 长度FACE TO FACE:GB/T-12221/ASMW B16.1
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598

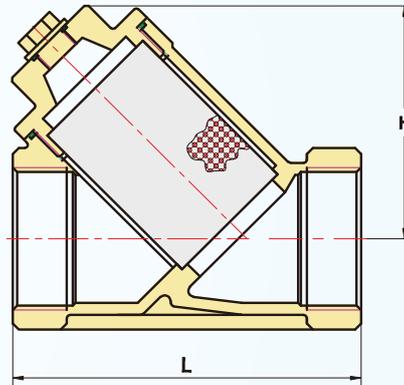

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST
1	阀体 BODY	不锈钢 CF8M/CF8
2	阀盖 END CAP	不锈钢 CF8M/CF8
3	过滤网 FILTER NET	不锈钢 CF8M/CF8
4	线条 BODY SEAL	聚四氟乙烯 PTFE
5	螺帽线条 NUT LINE	聚四氟乙烯 PTFE
6	螺帽 HANDLE NUT	不锈钢 SS316/304

外形尺寸 OUTER SIZE



Unit:mm

SIZE	L	H
3/8"	65	38
1/2"	65	38
3/4"	78	48
1"	90	57
1-1/4"	106	62
1-1/2"	120	67
2"	140	79
2-1/2"	178	105
3"	215	131
4"	264	159

## Y型软密封内螺纹止回阀 Y TYPE SOFT SEALING CHECK VALVE THREAD END

# DAGO

- 防爆中轴/全流BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 150°C
- 使用压力PRESSURE:PN63/1000WOG
- 设计制造DESIGN:GB/T-12237/ANSI B16.34
- 尺寸参照FLANGE DIMENSIONS:GB/ T-9113.1  
/ASME B16.5 CLASS 150
- 长度FACE TO FACE:GB/T-12221/ASMW B16.1
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598

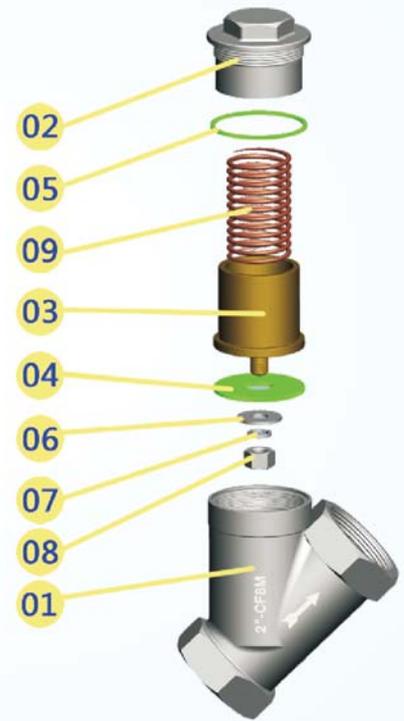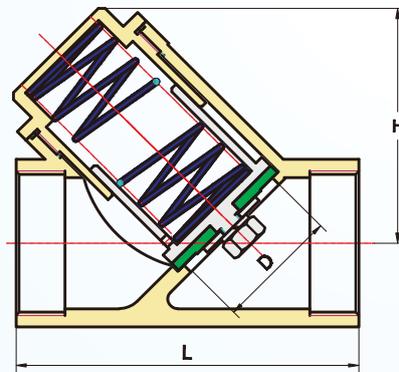

### 材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST
1	阀体 BODY	不锈钢 CF8M CF8
2	阀盖 END CAP	不锈钢 CF8M CF8
3	阀瓣 DISC	不锈钢 CF8M CF8
4	阀座 SEAL	氟橡胶
5	线条 BODY SEAL	聚四氟乙烯 PTFE
6	金属垫片 WASHER	不锈钢 SS316 304
7	弹垫 STUD	不锈钢 SS316 304
8	螺母 NUT	不锈钢 SS316 304
9	弹簧 SPRING	不锈钢 SS316 304

### 外形尺寸 OUTER SIZE

Unit:mm

SIZE	D	H	L
1/4"	13	45.2	65
3/8"	13	45.2	65
1/2"	16	45.2	65
3/4"	20	55.7	78
1"	25.5	68.3	90
1-1/4"	33	72.5	106
1-1/2"	40	78.6	120
2"	5B0	92	140
2-1/2"	64	125	178
3"	76	156	215
4"	100	195	264