

A41H-¹⁶/₂₅/₄₀ C/P/R型 弹簧微启封闭式安全阀 Spring low lift closed safety valve

● 用途:


A41Y适用于工作温度≤300℃的石油、空气、水等介质的设备或管路上。A41Y-P/R型适用于工作温度≤200℃有腐蚀性介质的设备上或管路上，作为超压保护装置。

● Use:

A41Y type are used for the equipment and pipelines with such media as petroleum, air and water at a working temperature less than 300°C. A41Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C. They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
20	15	20	100	85	275	
25	20	25	100	85	275	
32	25	32	115	100	285	
40	32	40	120	110	285	
50	40	50	135	120	355	
65	50	65	140	130	390	
80	65	80	160	135	394	
100	80	100	170	160	500	
125	100	125	190	190	570	
150	125	150	205	195	585	
200	150	200	240	230	710	
250	200	250	350	320	905	

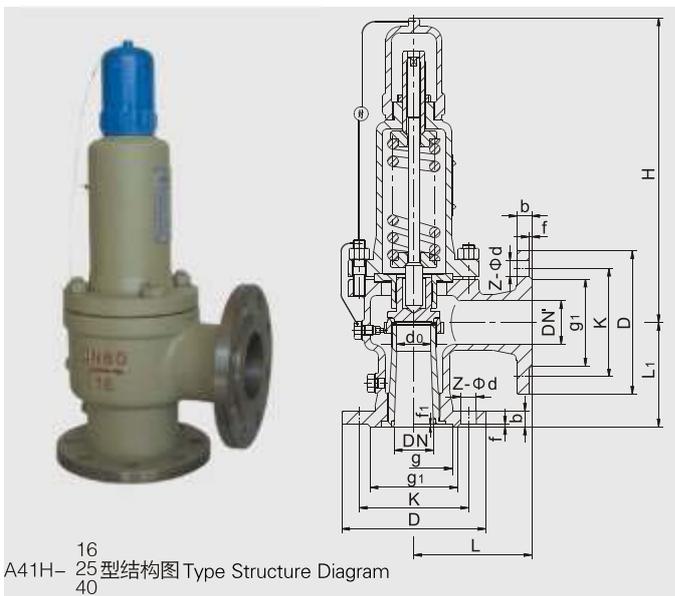

A41Y-⁶⁴/₁₀₀ C/P/R型 弹簧微启封闭式安全阀 Spring low lift closed safety valve

● 用途:


A41Y适用于工作温度≤300℃的石油、空气、水等介质的设备或管路上。A41Y-P/R型适用于工作温度≤200℃有腐蚀性介质的设备上或管路上，作为超压保护装置。

● Use:

A41Y type are used for the equipment and pipelines with such media as petroleum, air and water at a working temperature less than 300°C. A41Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C. They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
20	15	20	100	95	268	
25	20	25	100	95	268	
32	25	32	115	105	279	
40	32	40	135	115	330	
50	40	50	160	130	365	
65	50	65	175	160	503	
80	65	80	175	160	498	
100	80	100	190	180	530	
150	100	150	280	260	657	

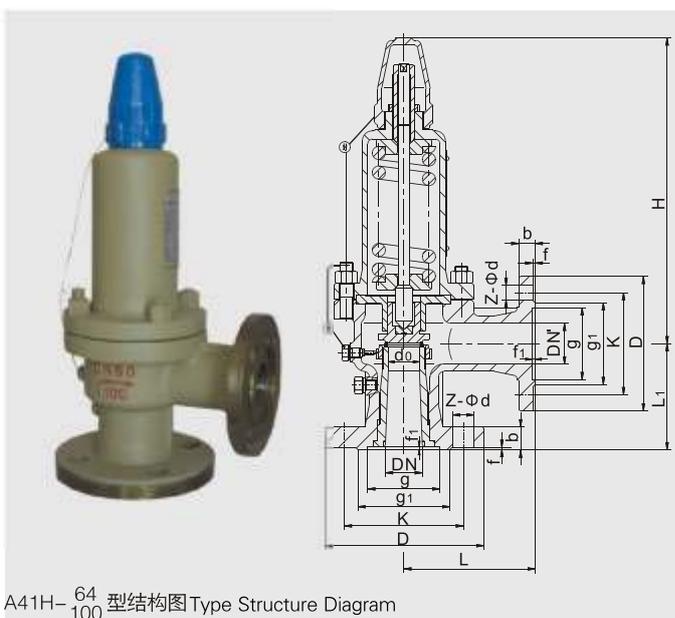

A42Y-¹⁶/₂₅/₄₀ C/P/R型 弹簧全启封闭式安全阀 Spring fall lift closed safety valve

● 用途:


A42Y-C适用于工作温度≤300℃的空气、石油气、液体等介质的设备或管路上。A42Y-P/R型适用于工作温度≤200℃有腐蚀性介质的设备上或管路上，作为超压保护装置。

● Use:

A42Y-C type are used for the equipment and pipelines with such media as air, petroleum gas and liquids at a working temperature less than 300°C. A42Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C. They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 Nominal DN Diameter	do	DN'	L	L ₁	≈H
20	15	25	110	95	281
25	16	32	110	95	281
32	20	40	115	100	285
40	25	50	120	110	295
50	32	65	135	120	305
65	40	80	160	140	394
80	50	100	170	135	406
100	65	125	205	160	511
125	80	150	210	190	586
150	100	175	255	230	601
200	125	250	305	260	734
250	150	300	350	320	928
300	200	400	370	350	1159
350	250	500	375	415	1314
400	280	500	395	415	1530

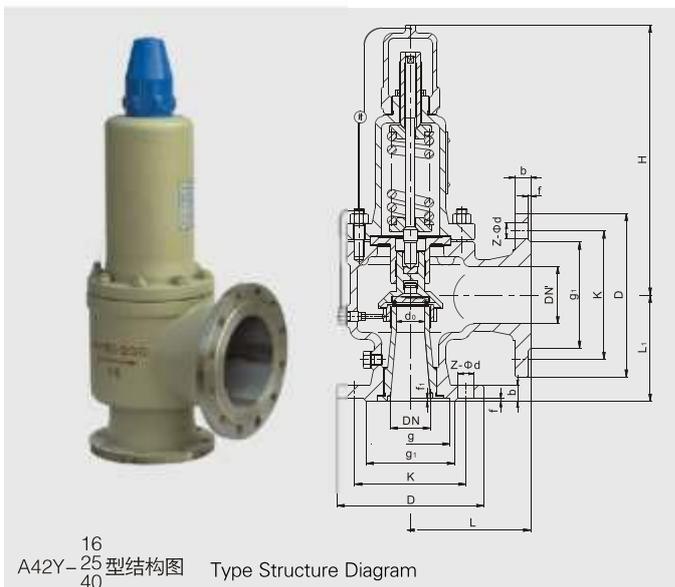

A42Y-⁶⁴/₁₀₀ C/P/R型 弹簧全启封闭式安全阀 Spring fall lift closed safety valve

● 用途:

A42Y-C适用于工作温度≤300℃的空气、石油气、液体等介质的设备或管路上。A42Y-P/R型适用于工作温度≤200℃有腐蚀性介质的设备上或管路上，作为超压保护装置。

● Use:

A42Y-C type are used for the equipment and pipelines with such media as air, petroleum gas and liquids at a working temperature less than 300°C. A42Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C. They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

型号 Type	公称通径 Nominal DN Diameter	do	DN'	L	L ₁	≈H
	20	12	25	110	100	276
	25	16	32	110	100	276
	32	20	40	130	110	287
A42Y-64C	40	25	50	135	120	292
A42Y-64P	50	32	65	160	130	383
A42Y-64R	65	40	80	175	160	479
	80	50	100	175	160	489
	100	65	125	195	195	562
	150	100	200	285	260	832
	20	12	25	110	100	276
	25	16	32	110	100	276
	32	20	40	130	110	287
A42Y-100C	40	25	50	135	120	292
A42Y-100P	50	32	65	160	130	383
A42Y-100R	65	40	80	175	160	479
	80	50	100	175	160	489
	100	65	125	195	195	562
	150	100	200	285	260	832

